

Domos 32" LED Large Pendant

Project:

Note:

Type:

Quantity:

Model#: DOM- FR - 32 - -- 23W - SP6 -

Description

Subtle, arching geometric forms with color and scale. Quality illumination delivered via integrated, highly efficient LEDs. This fixture incorporates universal voltage input and universal dimming.

Features

- Suspends from an 144" adjustable cable
- Optional integrated LED light kit with glass diffuser comes with a 12' black power cord
- Spun aluminum construction with a powder coated paint finish
- Damp location rated




Specifications

- Color Rendering Index: 90CRI
- LED Color Temperature: 3000K (standard)
- Fixture Wattage: 23W
- Delivered Lumens: 1467 Lm
- Cable Length: 144"
- Fixture Weight: 58.6 (26.6 kg)
- For recommended dimmers, see http://blackjacklighting.com

Options

- Available in: WG-White w/Gold Interior or BG-Black w/Gold Interior
- Available in 2700K, 3000K, 3500K, and 4000K Color Temperatures
- Mounting: See page 2 for mounting options

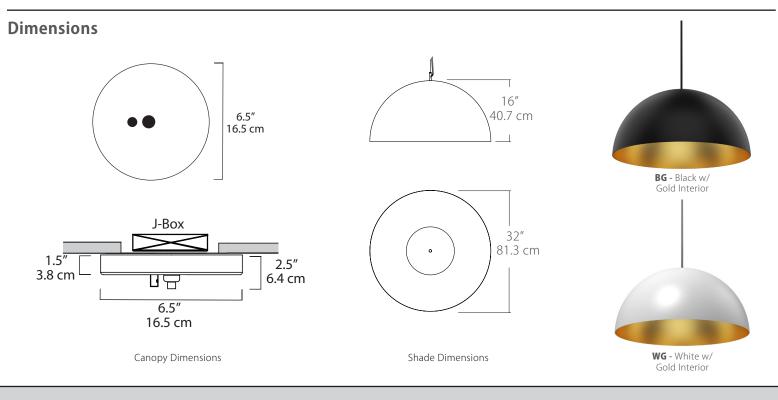

ORDERING GUIDE

Series	Diffuser	Size	Finish	Color Temperature	Wattage	Mounting	Length
DOM -	FR	32	-	- 30K -	23W	- SP6	-
DOM Domos	FR Frosted Diffuser w/ Integrated Light Kit	32 32" Diameter V-SP6-144	WG White w/Gold Interior BG Black w/Gold Interior	27K 2700K 30K 3000K 35K 3500K 40K 4000K (30K Standard)	23W 23 Watts	SP6 6.5" Canopy (See page 2 for mounting information)	144 (144" cable length standarsd) ### for cable length other than 144" specify cable length in inches



We reserve the right to change, modify or upgrade our products without notice. © 2023 Blackjack Lighting LLC

tel: (847) 941-0588 fax: (847) 306-3432 email: sales@blackjacklighting.com



Pendant Options

Finish							
Finish WG BG	WG = Whi	te with Gold Interior	BG = Black with Gold Interior				
Wattage							
Wattage 23W	23W = 23 Watts / 1467 Lumer	15					
23W (Lumens measured at 3000K)							
Mounting							
Mounting SP6	SP6 = 6.5" canopy with integ Cable with modular connec	rated driver (included), attaches to rear of ca tor attaches to canopy w/ integrated universal driver (i	nopy and sits inside ceiling mounted junction box /20-277V / TRIAC, ELV, 0-10V dimming)				
Pendant Mounting	Canopy	Dimensions	End/Side View	Finish Options			
SP6	6.5" Canopy Canopy and driver included with pendant	() () () () () () () () () () () () () (.8″ ۲ 2 cm (Integrated Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver			
	(5.	SP6 6.5" Canopy (integrated driver) J-Box 1.5 3.8 cm 4.5 cm 6.4 cm 6.5 cm 6.4 cm 6.5 cm 6.4 cm 6.5 cm 7 Canopy 6.4 cm 6.5 cm 7 Canopy 6.4 cm 7 Canopy 7 Canopy 6.4 cm 7 Canopy 7 Canopy 8 cm to 409 cm) 7 Canopy 7 Ca					

Max Cable Length



144 = 144" cable length is standard.

= Specify maximum cable length needed for fixture (in inches).

Factory pre-configuration of cable length is available. Consult factory for details.



We reserve the right to change, modify or upgrade our products without notice. © 2023 Blackjack Lighting LLC

tel: **(847) 941-0588** fax: **(847) 306-3432** email: **sales@blackjacklighting.com**