

Project:

Type:

Quantity:

Note:

SKU#: MLO - 48V - - - 30K - DB

Description

A tubular frosted acrylic diffuser paired with a stamped steel backplate adds contemporary styling to any space.

Features

- Stamped Steel construction
- Standard Finish: SN - Satin Nickel
- Frosted acrylic tube diffuser
- Driver located in backplate of fixture
- Damp location rated
- JA8-2016 Listed




Specifications

- Color Rendering Index: 90 CRI
- LED Color Temperature: 3000K (Standard)
- Fixture Wattage: 25W
- Input Voltage: 120 VAC 50/60Hz
- Lumens: 1780 Lm (measured at 3000K)
- Fixture Weight: 5.4 lb. (2.5 kg)
- Deep Backplate: 12.25" x 4.6" x 1.5" (Standard)
- Dimming: Universal (Standard)
- For recommended dimmers, see <http://blackjacklighting.com>

Options

- Available in 2700K, 3000K, 3500K, and 4000K Color Temperatures
- Special Order Paint Finishes: BZ - Bronze, SG - Satin Gold or BL - Matte Black

Dimensions

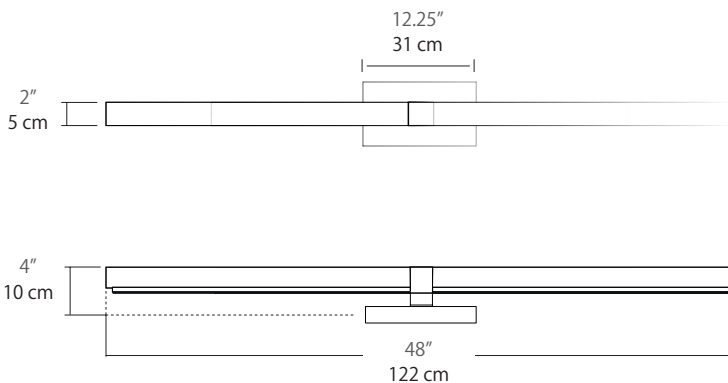

(Shown above with standard 12.25" x 4.6" x 1.5" blackplate)

Fixture



MLO-48V-SN-27U-30K-DB

ORDERING GUIDE

Family

MLO

MLO Milo

Size

48V

48V 48" Vanity

Finish

Standard
SN Satin Nickel
Special Order
BL Matte Black
BZ Bronze
SG Satin Gold

Volts/Dimming

Standard
27U 120-277VAC
Universal Dimming
(Deep Backplate Only)

Color Temp.

30K

30K 3000K (Default)
27K 2700K
35K 3500K
40K 4000K

Backplate

DB

Standard
DB Deep Backplate
(Driver located in backplate)

Example: MLO-48V-SN-27U-30K-DB

Finishes

<p>Finish</p> <div style="background-color: white; width: 20px; height: 20px; margin: 5px;"></div> <p>SN</p> <p>BL</p> <p>BZ</p> <p>SG</p>				
	SN - Satin Nickel	BL - Matte Black	BZ - Bronze	SG - Satin Gold
	Standard Finish		Special Order Powder Coat Finishes	

Volts/Dimming

<p>Volts/Dimming</p> <div style="background-color: white; width: 20px; height: 20px; margin: 5px;"></div> <p>27U</p>	<p>27U: Input: 120-277V, Dimming: TRIAC / ELV / 0-10V (Standard)</p>
---	---

Color Temperature

<p>Color Temp.</p> <div style="background-color: white; width: 20px; height: 20px; margin: 5px;"></div> <p>27K</p> <p>30K</p> <p>35K</p> <p>40K</p>	<p>27K - 2700K</p> <p>30K - 3000K (Default)</p> <p>35K - 3500K</p> <p>40K - 4000K</p>
--	---

Backplates

<p>Backplates</p> <div style="background-color: white; width: 20px; height: 20px; margin: 5px; display: flex; align-items: center; justify-content: center;"> <p>DB</p> </div> <p>DB</p>	<p>Deep Backplate (Standard)</p> <p>Backplate (12.25" H, 4.6" W, 1.3" D) - Driver located inside backplate</p>	<p>Front Plate</p> <p>12.25" / 31.2 cm</p> <p>4.6" / 11.7 cm</p> <p>1.3" / 3.3 cm</p> <p>3.9" / 9.9 cm</p> <p>4.6" / 11.7 cm</p> <p>Driver</p>
--	---	---