

Project: _____ Type: _____ Quantity: _____
 Note: _____ SKU#: SP - NVT - 02 - 5W - _____

Description

The Novo Tall 16" pendant is a simple geometric cylindrical form. Executed in aluminum, this pendant uses an integrated LED light source, and offers a choice of optical light guide diffusers. Even light distribution in all directions.

Features

- Aluminum extruded housing
- Available with screw-in reflector or optical acrylic light guide diffusers
- Damp location rated



QUICK SHIP | AVAILABLE
IN 2 WEEKS
ONLY AVAILABLE FOR:
RR Reflector Ring &
LR Luminous Ring


Specifications

- Color Rendering Index: 90CRI
- LED Color Temperature: 3000K (standard)
- Input Voltage: 120–270VAC 50/60Hz
- Fixture Wattage: 5W
- Delivered Lumens: 368 Lm
- Cable Length: 8' (for longer lengths consult factory)
- For recommended dimmers, see <http://blackjacklighting.com>

Options

- Color Temperature: 2700K, 3000K, 3500K, and 4000K
- Standard Finishes: BL - Black, PC - Polished Chrome or WH - White
- Special Order Powder Coat Finishes: BZ - Bronze, SG - Satin Gold, or SS - Satin Silver
- Light Guide: RR - Reflector Ring, LR - Luminous Ring, FR - Frosted or BU - Bubble
- Mounting: See page 2 for mounting options

Dimensions

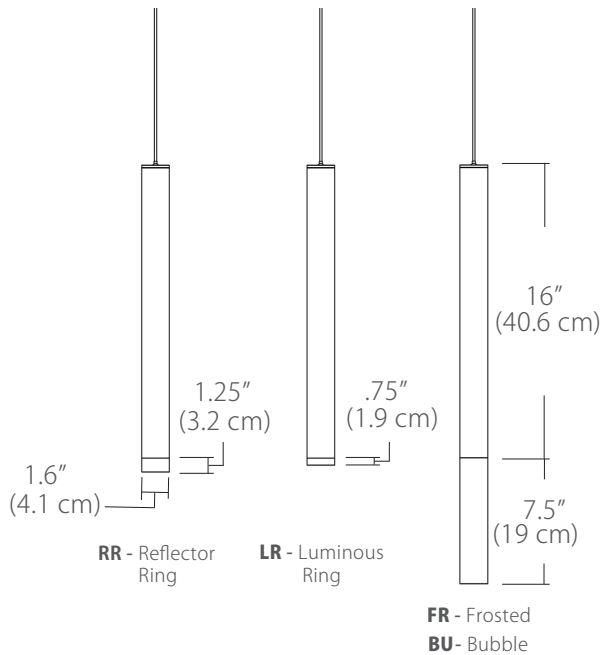

Diffusers



ORDERING GUIDE

Category	Series	Diffuser	Size	Finish	Color Temp.	Wattage	Mounting	Length
SP	NVT		02		30K	5W		
SP Small Pendant	NVT Novo Tall 16"	LR .75"H Luminous Ring RR 1.25"H Reflector Ring FR 7.5" Frosted BU 7.5" Bubble	02 2" Diameter	Standard BL Black PC Polished Chrome WH White Special Order BZ Bronze SG Satin Gold SS Satin Silver	27K 2700K 30K 3000K 35K 3500K 40K 4000K (30K Standard)	5W 5 Watts / 368 Lm	SP5 5" Canopy SP2 2.5" Fascia Canopy MPC Multi-Port Connector JTA JackTrack Adapter	96" Standard (Change Length for custom cable length in inches)


Example: SP-NVT-FR-02-BL-30K-5W-SP5-96

(See page 2 for mounting information)


Finish


Finish  PC BL WH BZ SG SS	     
	PC - Polished Chrome BL - Matte Black WH - White BZ - Bronze SG - Satin Gold SS - Satin Silver
	Standard Finishes Special Order Powder Coat Finishes

Wattage


Wattage  5W	5W = 5 Watts / 368 Lumens <i>(Lumens measured at 3000K)</i>
---	---

Mounting

Mounting  SP5 SP2 MPC JTA	<p>SP5 = 5" canopy with integrated driver (included), attaches to rear of canopy and sits inside ceiling mounted junction box <i>Cable with modular connector attaches to canopy w/ integrated universal driver (120-277V / TRIAC, ELV, 0-10V dimming)</i></p> <p>SP2 = 2.5" thin profile canopy that attaches flush to a rigid ceiling (driver sold separately) <i>Cable with modular connector (and optional wire harness) attaches to a remote driver</i></p> <p>MPC = Multi-port connector attaches to any of BlackJack's Multi-Port canopies (canopy and driver sold separately) <i>Cable with modular connector attaches to a driver inside a Multi-Port canopy (driver may be remote)</i></p> <p>JTA = Adapter connects the pendant in any position along the JackTrack system (track and driver sold separately) <i>Cable is cut to length and inserted in a connector at the bottom of the JackTrack adapter</i></p>
--	---

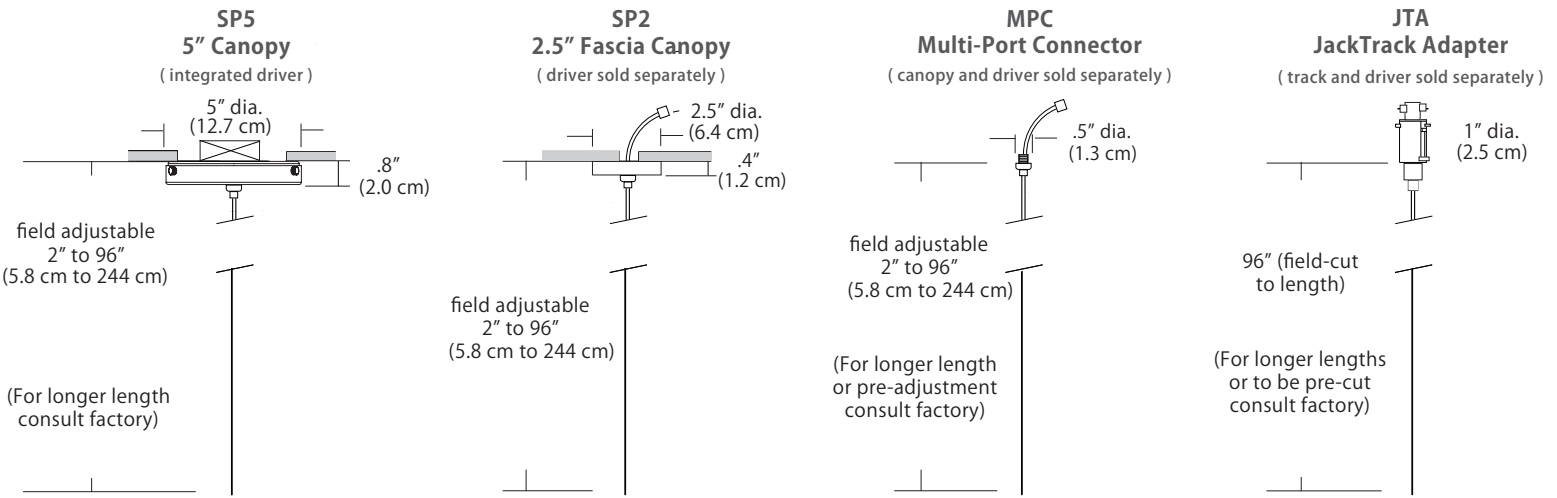



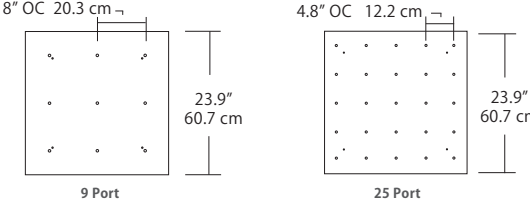

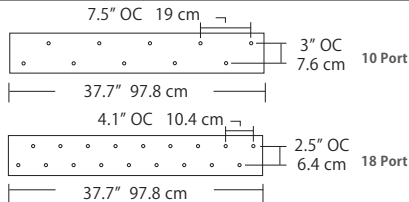

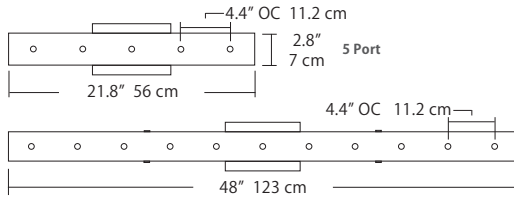

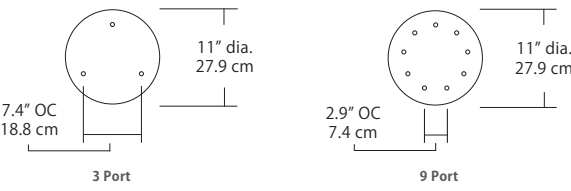

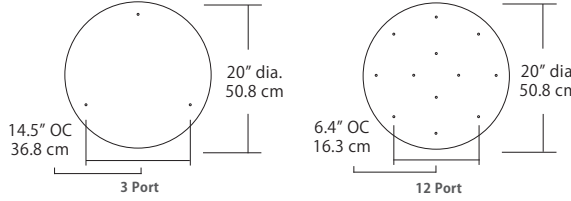

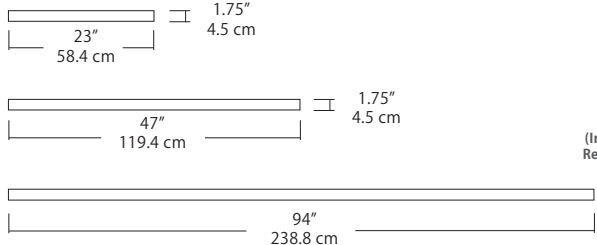



Max Cable Length

Length  96" (Standard) Custom	96" (Standard) (Change Length for custom cable length, in inches) <i>Factory pre-configuration of cable length is available. Consult factory for details.</i>
--	--

For full specifications and ordering information, see blackjacklighting.com

(# symbol indicates additional specification required)

Pendant Mounting	Canopy	Dimensions	End / Side View	Finish Options
SP5	5" Canopy Canopy and driver included with pendant	 5" dia. 12.7 cm	 (Integrated Driver) .8" / 2 cm	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
SP2	2.5" Fascia Canopy Canopy included with pendant. Driver sold separately.	 2.5" dia. 6.4 cm	 (Remote Driver required) .4" / 1.3 cm	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC	24" Multi-Port Square - 9 Port C-MPS-2409-# 24" Multi-Port Square - 25 Port C-MPS-2425-#	 8" OC 20.3 cm 23.9" 60.7 cm 4.8" OC 12.2 cm 23.9" 60.7 cm 9 Port 25 Port	 21.5" 54.6 cm 2.5" 6 cm (Integrated or Remote Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC	38" Multi-Port Rectangle - 10 Port C-MPT-3810-# 38" Multi-Port Rectangle - 18 Port C-MPT-3818-#	 7.5" OC 19 cm 37.7" 97.8 cm 3" OC 7.6 cm 10 Port 4.1" OC 10.4 cm 2.5" OC 6.4 cm 18 Port 37.7" 97.8 cm	 4.7" 11.9 cm 2.5" 6 cm 6" 15.2 cm (Integrated or Remote Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC	22" Multi-Port Linear - 5 Port C-MPL-2205-# 48" Multi-Port Linear - 11 Port C-MPL-4811-#	 4.4" OC 11.2 cm 21.8" 56 cm 2.8" 7 cm 5 Port 4.4" OC 11.2 cm 48" 123 cm 2.8" 7 cm 11 Port	 2.8" 7 cm 1.4" 4 cm (Integrated or Remote Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC	10" Round - 3 Port C-MPR-1003-# 10" Round - 9 Port C-MPR-1009-#	 11" dia. 27.9 cm 7.4" OC 18.8 cm 3 Port 11" dia. 27.9 cm 2.9" OC 7.4 cm 9 Port	 10" dia. 25.4 cm 2.1" 5.3 cm (Integrated Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC	20" Round - 3 Port C-MPR-2003-# 20" Round - 12 Port C-MPR-2012-#	 20" dia. 50.8 cm 14.5" OC 36.8 cm 3 Port 20" dia. 50.8 cm 6.4" OC 16.3 cm 12 Port	 18" dia. 45.7 cm 2.5" 6 cm (Integrated Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
JTA	24" JackTrack See JackTrack Spec Sheet 48" JackTrack See JackTrack Spec Sheet 94" JackTrack See JackTrack Spec Sheet	 23" 58.4 cm 1.75" 4.5 cm 47" 119.4 cm 1.75" 4.5 cm 94" 238.8 cm 1.75" 4.5 cm	 1.38" 3.5 cm 1.75" 4.5 cm (Integrated or Remote Driver)	BL Matte Black WH White

For full specifications and ordering information, see blackjacklighting.com


(# symbol indicates additional specification required)

System	Pendant Mounting	Configuration Examples	Finish Options
--------	------------------	------------------------	----------------


Quatro

Square Configurations - See [Quatro Square Configurations](#) section of our website for specification information (#)

4S (4' 2x2' / 9 Port)
MSQ-2409-##-4S-##

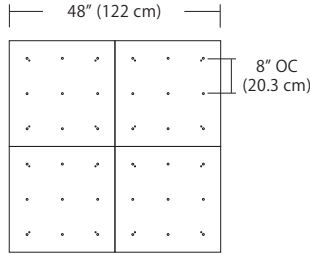

6S (6' 3x3 / 25 Port)
MSQ-2425-##-6S-##

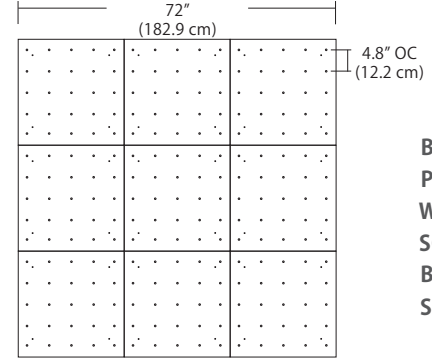


MPC


- BL Matte Black
- PC Pol. Chrome
- WH White
- SG Satin Gold
- BZ Bronze
- SS Satin Silver

Linear Configurations - See [Quatro Linear Configurations](#) section of our website for specification information (#)

4L (4'x2' / 9 Port)
MSQ-2409-##-4L-##




6L (6'x2' / 25 Port)
MSQ-2425-##-6L-##

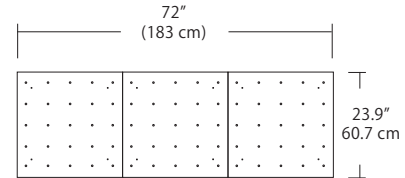

Duo

Linear Configurations - See [Duo Linear Configurations](#) section of our website for specification information (#)


6L (6'4"x6" / 10 Port)
MSD-3810-##-6L-##

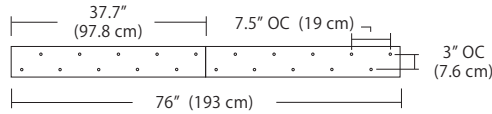

MPC


- BL Matte Black
- PC Pol. Chrome
- WH White
- SG Satin Gold
- BZ Bronze
- SS Satin Silver

9L (9'6"x6" / 18 Port)
MSD-3818-##-9L-##

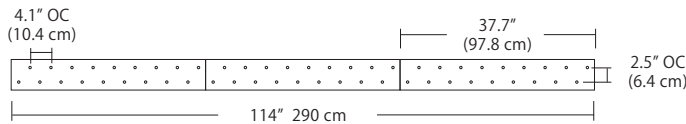


Solo

Solo 48" Linear Configuration - See [Solo Linear Configuration](#) section of our website for specific information (#)




Solo (L) Configuration

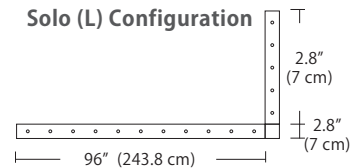


Solo 22" Grid Configuration - See [Solo Grid Configuration](#) section of our website for specific information (#)

MPC

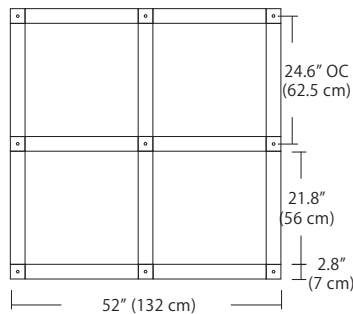

Solo 48" Grid Configuration

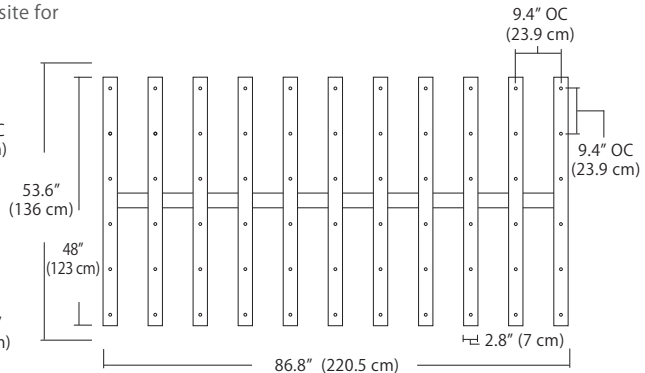

- BL Matte Black
- PC Pol. Chrome
- WH White
- SG Satin Gold
- BZ Bronze
- SS Satin Silver