

Project:

Type:

Quantity:

Note:

SKU#: SP - COS - RR - 02 - - 30K - 5W - -

Description

The Short Cone's familiar aesthetics deliver a sharp, stately look to virtually any environment. Slightly recessed frosted disc diffuser provides high lumen output suitable for, and compatible with, all Blackjack Lighting systems.

Features

- Suspends from an 8' adjustable cable
- Damp location rated




Specifications

- Color Rendering Index: 90CRI
- LED Color Temperature: 3000K (standard)
- Cable Length: 8' (for longer lengths consult factory)
- Light Source: 5W / 397 Lumens
- For recommended dimmers, see <http://blackjacklighting.com>

Options

- Color Temperature: 3000K
- Standard Finishes: BL - Matte Black
- Special Order Powder Coat Finishes: PC - Polished Chrome, WH - White, BZ - Bronze, SG - Satin Gold, or SS - Satin Silver
- Mounting: See page 2 for mounting options

Dimensions

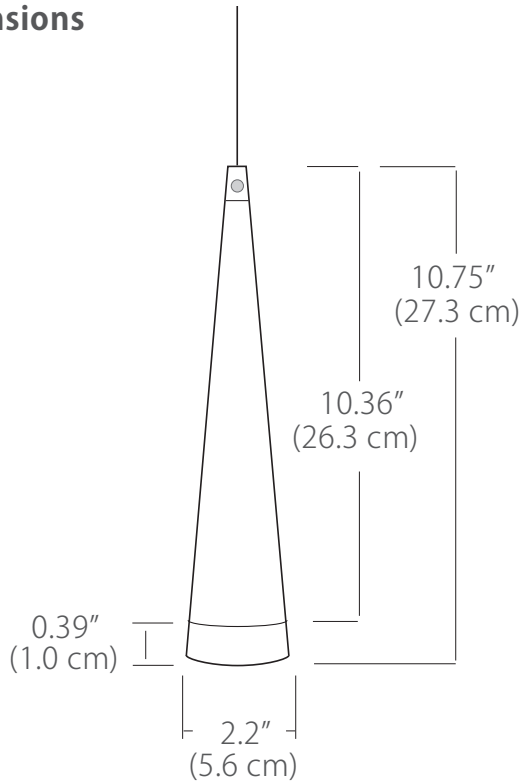

BL - Matte Black


ORDERING GUIDE

Category	Series	Diffuser	Size	Finish	Color Temp.	Wattage	Mounting	Length
SP	COS	RR	02		30K	5W		
SP Small Pendant	COS Short Cone	RR Reflector Ring	02 2" Diameter	BL Black PC Polished Chrome WH White BZ Bronze SG Satin Gold SS Satin Silver	27K 2700K 30K 3000K 35K 3500K 40K 4000K	5W 5Watts / 397 Lm	SP5 5" Canopy SP2 2.5" Fascia Canopy MPC Multi-Port Connector JTA JackTrack Adapter	96" Standard (Change Length for custom cable length in inches)
Example: SP-COS-RR-02-BL-30K-5W-SP5-96							(See page 2 for mounting information)	


Finish


Finish  PC BL WH BZ SG SS	  	  
	PC - Polished Chrome BL - Matte Black WH - White	BZ - Bronze SG - Satin Gold SS - Satin Silver
	Standard Finishes	Special Order Powder Coat Finishes

Wattage


Wattage  5W	5W = 5 Watts / 397 Lumens <i>(Lumens measured at 3000K)</i>
---	--

Mounting

Mounting  SP5 SP2 MPC JTA	<p>SP5 = 5" canopy with integrated driver (included), attaches to rear of canopy and sits inside ceiling mounted junction box <i>Cable with modular connector attaches to canopy w/ integrated universal driver (120-277V / TRIAC, ELV, 0-10V dimming)</i></p> <p>SP2 = 2.5" thin profile canopy that attaches flush to a rigid ceiling (driver sold separately) <i>Cable with modular connector (and optional wire harness) attaches to a remote driver</i></p> <p>MPC = Multi-port connector attaches to any of BlackJack's Multi-Port canopies (canopy and driver sold separately) <i>Cable with modular connector attaches to a driver inside a Multi-Port canopy (driver may be remote)</i></p> <p>JTA = Adapter connects the pendant in any position along the JackTrack system (track and driver sold separately) <i>Cable is cut to length and inserted in a connector at the bottom of the JackTrack adapter</i></p>
--	---









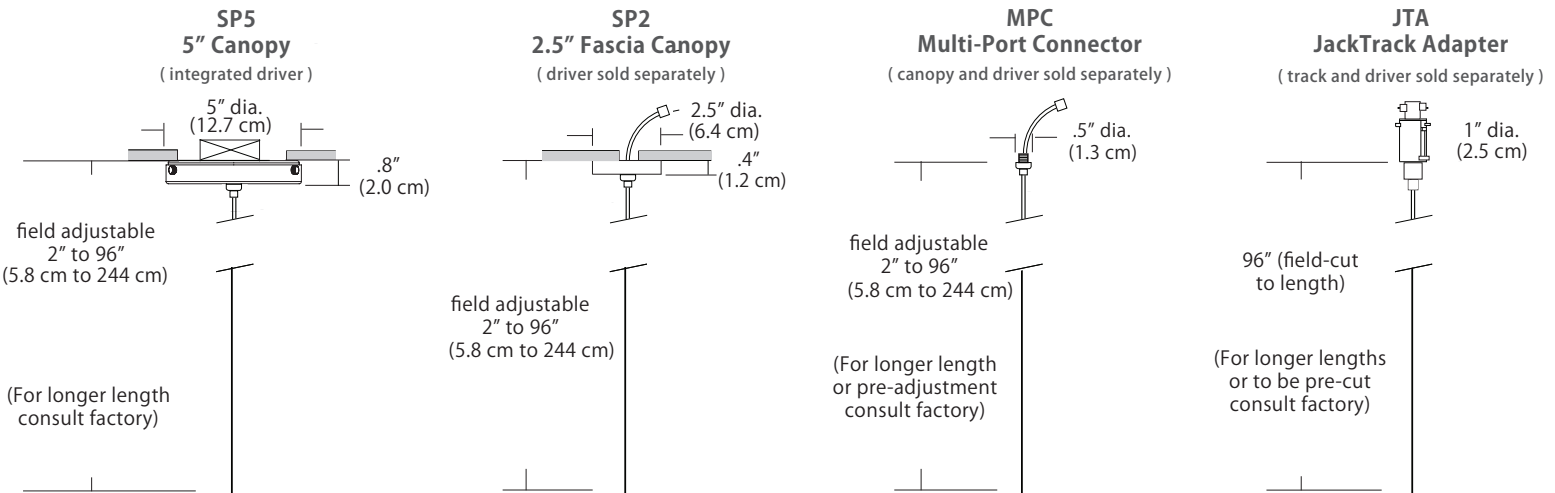

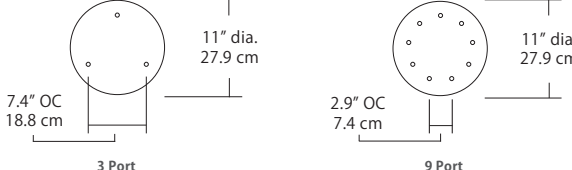

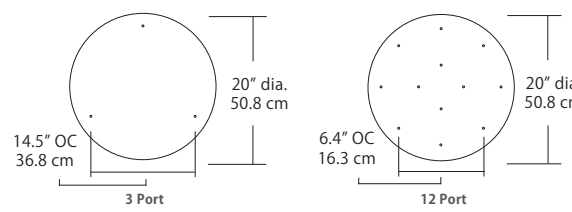

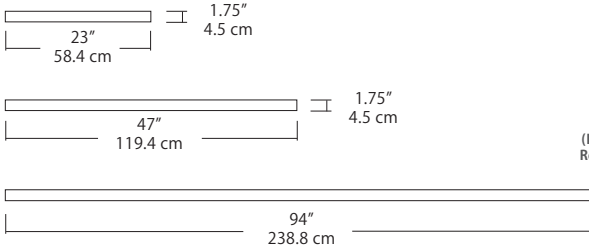



Max Cable Length

Length  96" (Standard) Custom	96" (Standard) (Change Length for custom cable length, in inches) <i>Factory pre-configuration of cable length is available. Consult factory for details.</i>
--	---

For full specifications and ordering information, see blackjacklighting.com

(# symbol indicates additional specification required)

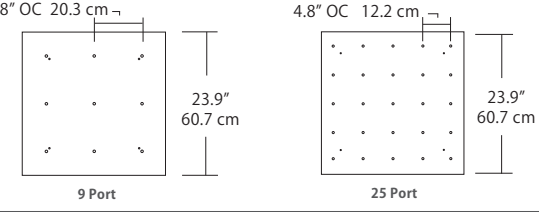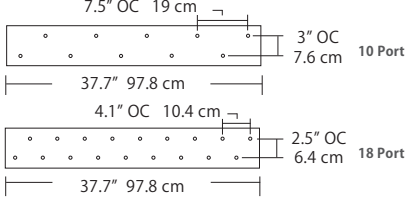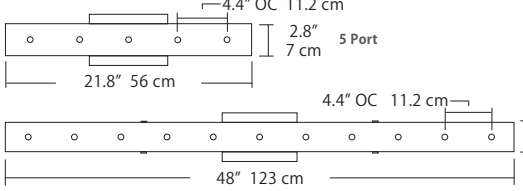Pendant Mounting	Canopy	Dimensions	End / Side View	Finish Options
SP5	5" Canopy Canopy and driver included with pendant	 5" dia. 12.7 cm	 (Integrated Driver) .8" 2 cm	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
SP2	2.5" Fascia Canopy Canopy included with pendant. Driver sold separately.	 2.5" dia. 6.4 cm	 (Remote Driver required) .4" 1.3 cm	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC	24" Multi-Port Square - 9 Port C-MPS-2409-# 24" Multi-Port Square - 25 Port C-MPS-2425-#	 8" OC 20.3 cm 23.9" 60.7 cm 9 Port 4.8" OC 12.2 cm 23.9" 60.7 cm 25 Port	 21.5" 54.6 cm 2.5" 6 cm (Integrated or Remote Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC	38" Multi-Port Rectangle - 10 Port C-MPT-3810-# 38" Multi-Port Rectangle - 18 Port C-MPT-3818-#	 7.5" OC 19 cm 37.7" 97.8 cm 3" OC 7.6 cm 10 Port 4.1" OC 10.4 cm 2.5" OC 6.4 cm 18 Port 37.7" 97.8 cm	 4.7" 11.9 cm 2.5" 6 cm 6" 15.2 cm (Integrated or Remote Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC	22" Multi-Port Linear - 5 Port C-MPL-2205-# 48" Multi-Port Linear - 11 Port C-MPL-4811-#	 4.4" OC 11.2 cm 21.8" 56 cm 2.8" 7 cm 5 Port 4.4" OC 11.2 cm 48" 123 cm 2.8" 7 cm 11 Port	 2.8" 7 cm 1.4" 4 cm (Integrated or Remote Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC	10" Round - 3 Port C-MPR-1003-# 10" Round - 9 Port C-MPR-1009-#	 7.4" OC 18.8 cm 3 Port 11" dia. 27.9 cm 2.9" OC 7.4 cm 9 Port 11" dia. 27.9 cm	 10" dia. 25.4 cm 2.1" 5.3 cm (Integrated Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC	20" Round - 3 Port C-MPR-2003-# 20" Round - 12 Port C-MPR-2012-#	 14.5" OC 36.8 cm 3 Port 20" dia. 50.8 cm 6.4" OC 16.3 cm 12 Port 20" dia. 50.8 cm	 18" dia. 45.7 cm 2.5" 6 cm (Integrated Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
JTA	24" JackTrack See JackTrack Spec Sheet 48" JackTrack See JackTrack Spec Sheet 94" JackTrack See JackTrack Spec Sheet	 23" 58.4 cm 1.75" 4.5 cm 47" 119.4 cm 1.75" 4.5 cm 94" 238.8 cm 1.75" 4.5 cm	 1.38" 3.5 cm 1.75" 4.5 cm (Integrated or Remote Driver)	BL Matte Black WH White

For full specifications and ordering information, see blackjacklighting.com


(# symbol indicates additional specification required)

System	Pendant Mounting	Configuration Examples	Finish Options
--------	------------------	------------------------	----------------


Quatro

Square Configurations - See [Quatro Square Configurations](#) section of our website for specification information (#)

4S (4' 2x2' / 9 Port)
MSQ-2409-##-4S-##

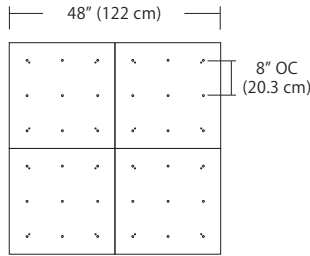

6S (6' 3x3 / 25 Port)
MSQ-2425-##-6S-##

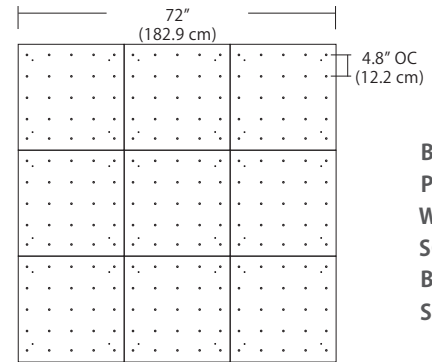


MPC


- BL Matte Black
- PC Pol. Chrome
- WH White
- SG Satin Gold
- BZ Bronze
- SS Satin Silver

Linear Configurations - See [Quatro Linear Configurations](#) section of our website for specification information (#)

4L (4'x2' / 9 Port)
MSQ-2409-##-4L-##




6L (6'x2' / 25 Port)
MSQ-2425-##-6L-##

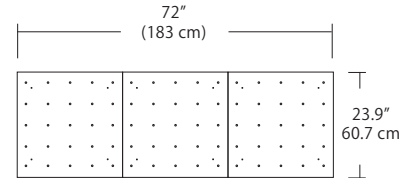

Duo

Linear Configurations - See [Duo Linear Configurations](#) section of our website for specification information (#)


6L (6'4"x6" / 10 Port)
MSD-3810-##-6L-##

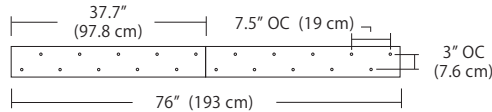

MPC


- BL Matte Black
- PC Pol. Chrome
- WH White
- SG Satin Gold
- BZ Bronze
- SS Satin Silver

9L (9'6"x6" / 18 Port)
MSD-3818-##-9L-##

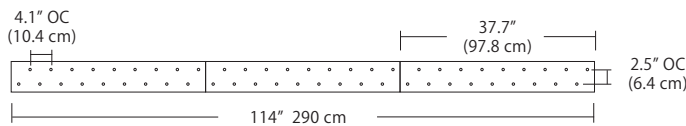


Solo

Solo 48" Linear Configuration - See [Solo Linear Configuration](#) section of our website for specific information (#)




Solo (L) Configuration

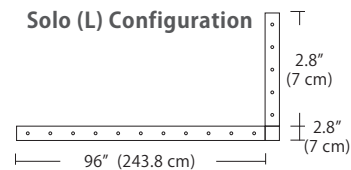

MPC

- BL Matte Black
- PC Pol. Chrome
- WH White
- SG Satin Gold
- BZ Bronze
- SS Satin Silver

Solo 22" Grid Configuration - See [Solo Grid Configuration](#) section of our website for specific information (#)

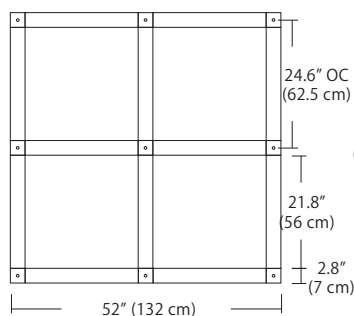

Solo 48" Grid Configuration

