

Project: _____ Type: _____ Quantity: _____
 Note: _____ SKU#: SP - LGD - TF - 01 - _ - _ - _ - _

Description

Screw-in, cast acrylic Tall Frosted light guide is sleek and very popular. Fixture hangs 6" to 96" inches from ceiling. Dimmable, damp location rated, replaceable light source. Available in three standard finishes and three special order powder coat finishes.

Features

- Screw-in, decorative optical acrylic light guide/ diffuser
- Suspends from 8' adjustable cable
- Standard Finishes: BL - Black, PC - Polished Chrome or WH - White
- Damp location rated




Specifications

- Color Rendering Index: 90CRI
- LED Color Temperature: 3000K (standard)
- Cable Length: 8' (see page 2 for detail), for longer lengths consult factory
- For recommended dimmers, see <http://blackjacklighting.com>

Options

- Color Temperature: 2700K, 3000K, 3500K, 4000K
- Lumens: 2W/86 Lumens or 3W/133 Lumens (recommended for single pendant application)
- Lamping: 2W or 3W
- Special Order Powder Coat Finishes for Canopy and Socket: BZ - Bronze, SG - Satin Gold or SS - Satin Silver

Dimensions

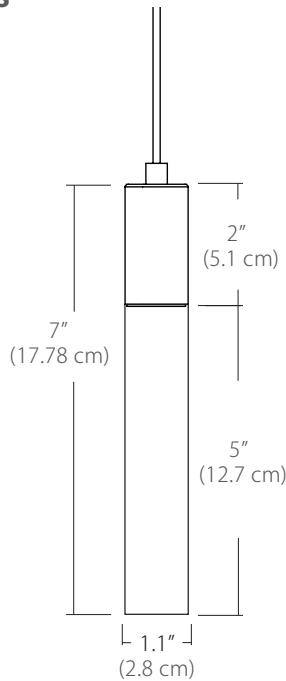

Diffuser



ORDERING GUIDE

Category	Series	Diffuser	Size	Finish	Color Temp.	Wattage	Mounting	Length
SP	LGD	TF	01		30K			
SP Small Pendant	LGD Light Guide	TF Tall Frosted	01 1" Diameter	Standard BL Black PC Polished Chrome WH White Special Order BZ Bronze SG Satin Gold SS Satin Silver	27K 2700K 30K 3000K 35K 3500K 40K 4000K (30K Standard)	2W 2Watts/86 Lm 3W 3Watts/133 Lm (recommended for single pendant application)	SP5 5" Canopy SP2 2.5" Fascia Canopy MPC Multi-Port Connector JTA JackTrack Adapter (See page 2 for mounting information)	96" Standard (Change Length for custom cable length in inches)

Example: SP-LGD-TF-01-BL-30K-2W-SP5-96


Finish


Finish  PC BL WH BZ SG SS	     
	<p>PC - Polished Chrome BL - Matte Black WH - White BZ - Bronze SG - Satin Gold SS - Satin Silver</p> <p style="text-align: center;"> Standard Finishes Special Order Powder Coat Finishes </p>

Wattage


Wattage  2W 3W	<p>2W = 2 Watts / 86 Lumens, recommended for Multi-Port applications (Multi-Port system and JackTrack adapter).</p> <p>3W = 3 Watts / 133 Lumens, recommended for single pendant applications (5" Canopy and 2.5" Fascia Canopy).</p> <p><i>(Lumens measured at 3000K)</i></p>
---	--

Mounting

Mounting  SP5 SP2 MPC JTA	<p>SP5 = 5" canopy with integrated driver (included), attaches to rear of canopy and sits inside ceiling mounted junction box <i>Cable with modular connector attaches to canopy w/ integrated universal driver (120-277V / TRIAC, ELV, 0-10V dimming)</i></p> <p>SP2 = 2.5" thin profile canopy that attaches flush to a rigid ceiling (driver sold separately) <i>Cable with modular connector (and optional wire harness) attaches to a remote driver</i></p> <p>MPC = Multi-port connector attaches to any of BlackJack's Multi-Port canopies (canopy and driver sold separately) <i>Cable with modular connector attaches to a driver inside a Multi-Port canopy (driver may be remote)</i></p> <p>JTA = Adapter connects the pendant in any position along the JackTrack system (track and driver sold separately) <i>Cable is cut to length and inserted in a connector at the bottom of the JackTrack adapter</i></p>
--	---



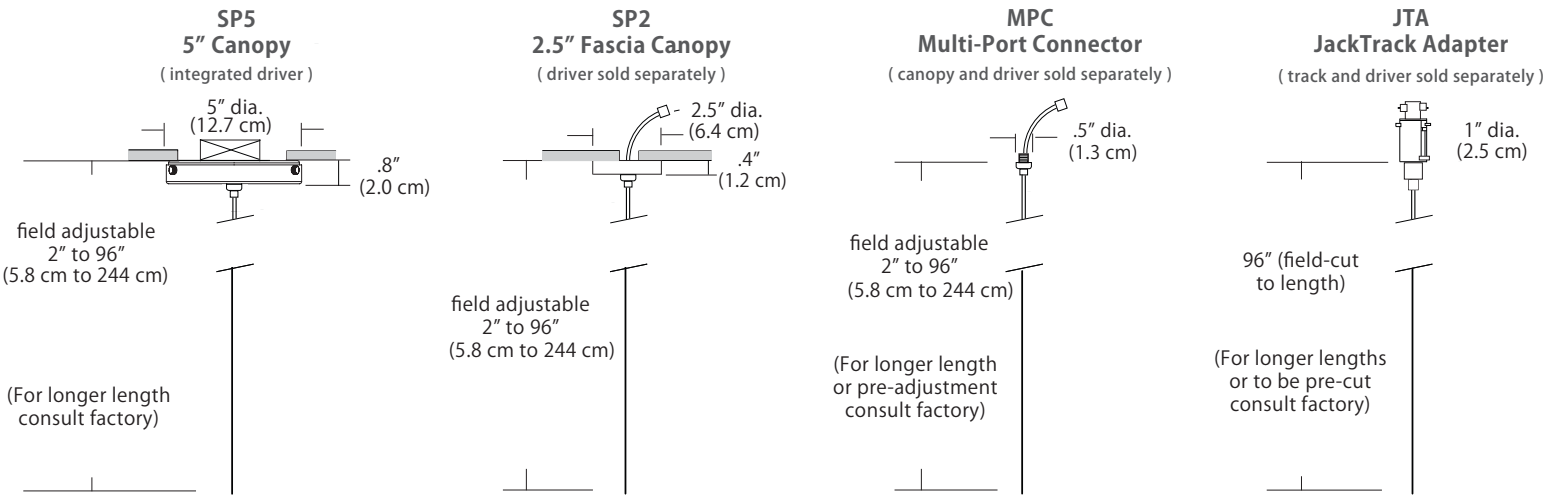

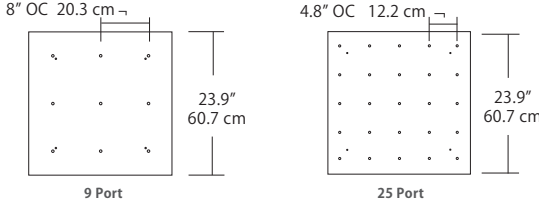

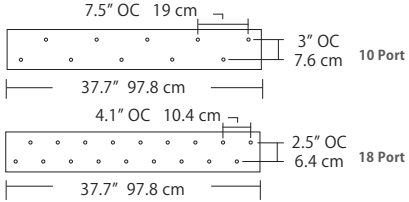

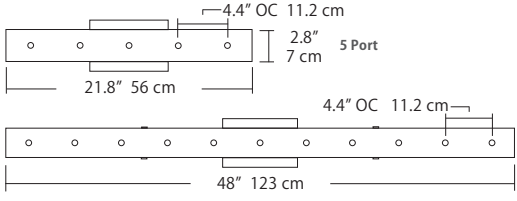

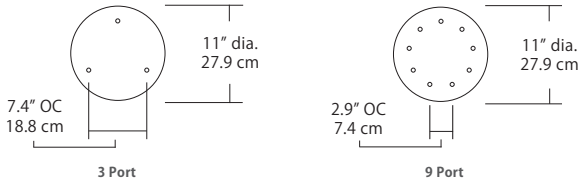

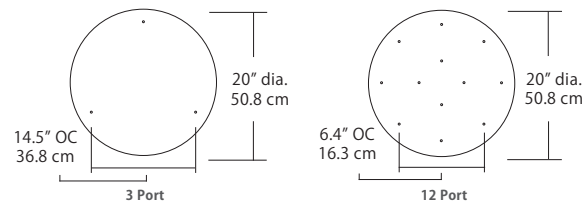

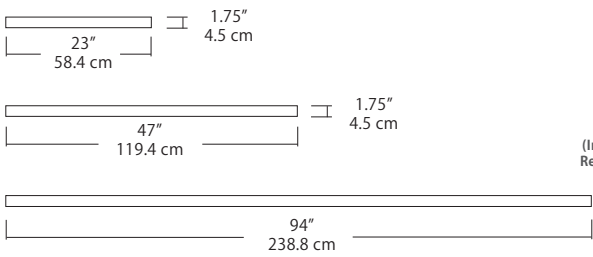



Max Cable Length

Length  96" (Standard) Custom	<p>96" (Standard)</p> <p>(Change Length for custom cable length, in inches)</p> <p><i>Factory pre-configuration of cable length is available. Consult factory for details.</i></p>
--	---

For full specifications and ordering information, see blackjacklighting.com

(# symbol indicates additional specification required)

Pendant Mounting	Canopy	Dimensions	End / Side View	Finish Options
SP5	5" Canopy Canopy and driver included with pendant	 5" dia. 12.7 cm	 (Integrated Driver) .8" / 2 cm	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
SP2	2.5" Fascia Canopy Canopy included with pendant. Driver sold separately.	 2.5" dia. 6.4 cm	 (Remote Driver required) .4" / 1.3 cm	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC	24" Multi-Port Square - 9 Port C-MPS-2409-# 24" Multi-Port Square - 25 Port C-MPS-2425-#	 8" OC 20.3 cm 23.9" 60.7 cm 4.8" OC 12.2 cm 23.9" 60.7 cm 9 Port 25 Port	 21.5" 54.6 cm 2.5" 6 cm (Integrated or Remote Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC	38" Multi-Port Rectangle - 10 Port C-MPT-3810-# 38" Multi-Port Rectangle - 18 Port C-MPT-3818-#	 7.5" OC 19 cm 37.7" 97.8 cm 3" OC 7.6 cm 10 Port 4.1" OC 10.4 cm 2.5" OC 6.4 cm 18 Port 37.7" 97.8 cm	 4.7" 11.9 cm 2.5" 6 cm 6" 15.2 cm (Integrated or Remote Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC	22" Multi-Port Linear - 5 Port C-MPL-2205-# 48" Multi-Port Linear - 11 Port C-MPL-4811-#	 4.4" OC 11.2 cm 21.8" 56 cm 2.8" 7 cm 5 Port 4.4" OC 11.2 cm 48" 123 cm 2.8" 7 cm 11 Port	 2.8" 7 cm 1.4" 4 cm (Integrated or Remote Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC	10" Round - 3 Port C-MPR-1003-# 10" Round - 9 Port C-MPR-1009-#	 11" dia. 27.9 cm 7.4" OC 18.8 cm 3 Port 11" dia. 27.9 cm 2.9" OC 7.4 cm 9 Port	 10" dia. 25.4 cm 2.1" 5.3 cm (Integrated Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC	20" Round - 3 Port C-MPR-2003-# 20" Round - 12 Port C-MPR-2012-#	 20" dia. 50.8 cm 14.5" OC 36.8 cm 3 Port 20" dia. 50.8 cm 6.4" OC 16.3 cm 12 Port	 18" dia. 45.7 cm 2.5" 6 cm (Integrated Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
JTA	24" JackTrack #-#-# 48" JackTrack #-#-# 94" JackTrack #-#-#	 23" 58.4 cm 1.75" 4.5 cm 47" 119.4 cm 1.75" 4.5 cm 94" 238.8 cm 1.75" 4.5 cm	 1.38" 3.5 cm 1.75" 4.5 cm (Integrated or Remote Driver)	BL Matte Black WH White

For full specifications and ordering information, see blackjacklighting.com


(# symbol indicates additional specification required)

System	Pendant Mounting	Configuration Examples	Finish Options
--------	------------------	------------------------	----------------


Quatro

Square Configurations - See [Quatro Square Configurations](#) section of our website for specification information (#)

4S (4' 2x2' / 9 Port)
MSQ-2409-##-4S-##

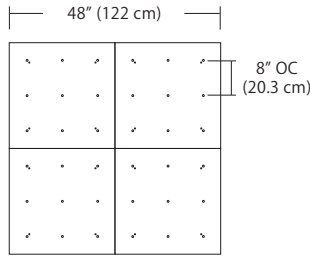

6S (6' 3x3 / 25 Port)
MSQ-2425-##-6S-##

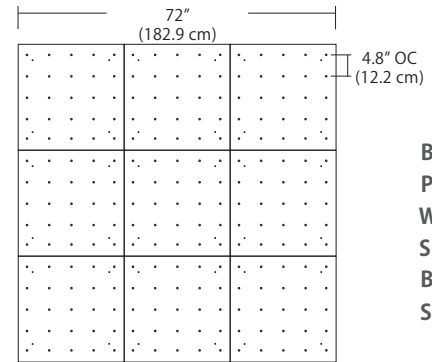


MPC


- BL Matte Black
- PC Pol. Chrome
- WH White
- SG Satin Gold
- BZ Bronze
- SS Satin Silver

Linear Configurations - See [Quatro Linear Configurations](#) section of our website for specification information (#)

4L (4'x2' / 9 Port)
MSQ-2409-##-4L-##




6L (6'x2' / 25 Port)
MSQ-2425-##-6L-##

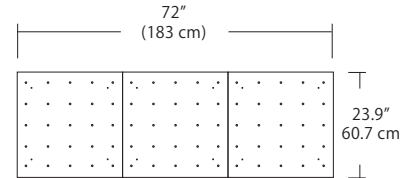

Duo

Linear Configurations - See [Duo Linear Configurations](#) section of our website for specification information (#)


6L (6'4"x6" / 10 Port)
MSD-3810-##-6L-##



MPC


- BL Matte Black
- PC Pol. Chrome
- WH White
- SG Satin Gold
- BZ Bronze
- SS Satin Silver

9L (9'6"x6" / 18 Port)
MSD-3818-##-9L-##

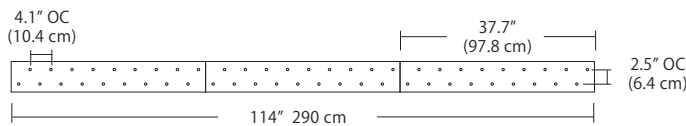


Solo

Solo 48" Linear Configuration - See [Solo Linear Configuration](#) section of our website for specific information (#)




Solo (L) Configuration

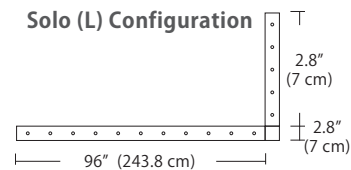

MPC

- BL Matte Black
- PC Pol. Chrome
- WH White
- SG Satin Gold
- BZ Bronze
- SS Satin Silver

Solo 22" Grid Configuration - See [Solo Grid Configuration](#) section of our website for specific information (#)

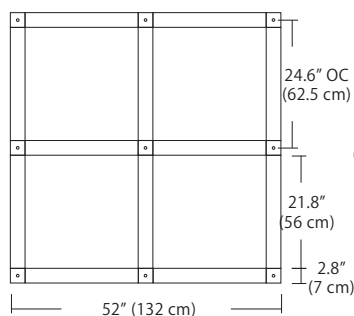

Solo 48" Grid Configuration

