UNIVERSAL

Universal 1/2" Clockwise Open Volume Control Valve

GUVC19



TECHNICAL DETAILS

ADA Compliance: Yes Fittings Hole Diameter: 1 3/8" Handle Turn Angle: Quarter Turn Depth / Width: 6 15/16" . Height: 2 9/16" Inlet Connection Size: 1/2" Inlet Connection Type: Female NPT Length: 1" Outlet Connection Size: 1/2" Outlet Connection Type: Female NPT Primary Material: Brass Suggested Application: Bath Valve Material: Ceramic Water Pressure Maximum: 85.0 psi Water Pressure Minimum: 20.0 psi Water Pressure Recommended: 45.0 psi

SHOWN IN UNIVERSAL 1/2" CLOCKWISE OPEN VOLUME CONTROL VALVE| GUVC19

INSPIRATION

Our Universal collection features timeless designs complementing any of our Waterworks. With a wide range of product, from fittings to accessories, Universal adds exquisite proportion and balance to any environment.

CODES & STANDARDS

Code # GUSV19: State of MA, NSF

PRODUCT FEATURES

Customize your bath experience with a hot cartridge rough, for use with Waterworks Studio wall valve trims 1/2" NPT female inlet and outlet with quarter turn functionality 6 gpm unrestricted maximum flow at 45 psi


Made of brass materials



WATERWORKS

UNIVERSAL

Universal 1/2" Clockwise Open Volume Control Valve

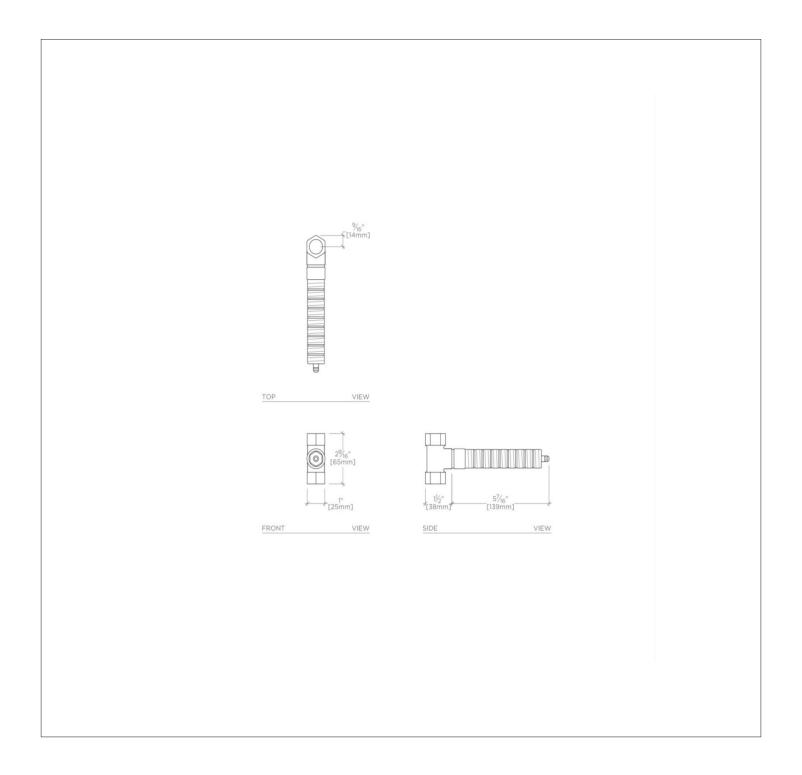

GUVC19