
BOND

BLS32B

Bond Tandem Series Wall Mounted Lavatory Faucet with Two-Tone Single Lever Handle

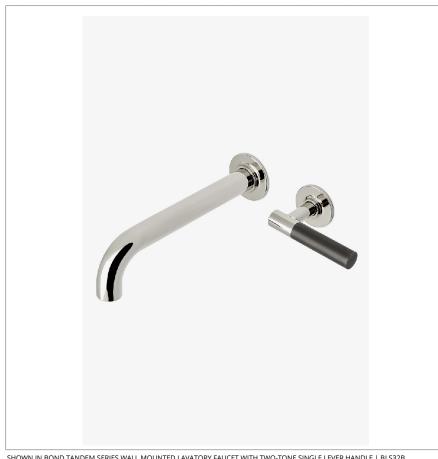

TECHNICAL DETAILS

ADA Compliance: Yes Drain Depth Maximum: 2 5/8" Drain Depth Minimum: 3/8" Drain Hole Diameter: 1 3/4" Drain Style: Push Touch Fittings Hole Diameter: 1 3/8" Handle Turn Angle: Quarter Turn Inlet Connection Size: 1/2" Inlet Connection Type: Female NPT Number Of Holes: Two Hole Primary Material: Brass Restricted Maximum Flow Rate: 1.2 gpm Spout Swivel: N Valve Material: Ceramic Water Pressure Maximum: 85.0 psi Water Pressure Minimum: 20.0 psi Water Pressure Recommended: 45.0 psi

SHOWN IN BOND TANDEM SERIES WALL MOUNTED LAVATORY FAUCET WITH TWO-TONE SINGLE LEVER HANDLE | BLS32B

INSPIRATION

Modern designs infused with rare soul and artistry. Explore our wide range of Bond bath and kitchen elements, from fittings to fixtures to hardware.

CODES & STANDARDS

NSF/ANSI/CAN 61:Q < 1, ASME A112.18.1/CSA B125.1, CEC, State of MA

PRODUCT FEATURES

Lever Handle

Includes European size push touch drain

Features Two-Tone Handle

Stocked in Nickel and Brass

Available in 1.2gpm (4.5L/min) flow rate; Requires rough valve, sold separately: GULV29

CERTIFICATIONS




PRODUCT (NOTES)

BOND


BLS32B


Bond Tandem Series Wall Mounted Lavatory Faucet with Two-Tone Single Lever Handle







SCALE: 1/2"=1'-0"








ADAPTER INCLUDED - INTERNATIONAL USE ONLY





SIDE VIEW

SCALE: 1/2"=1'-0"