

ViaWorks 3/4" Thermostatic Valve with 7" Tile Guard



SHOWN IN VIAWORKS 3/4" THERMOSTATIC VALVE WITH 7" TILE GUARD | GUTH78

### TECHNICAL DETAILS

ADA Compliance: Yes  
 Depth/Width: 3 1/2"  
 Fittings Hole Diameter: 7"  
 Height: 5 1/4"  
 Inlet Connection Size: 3/4"  
 Inlet Connection Type: Female NPT  
 Length: 6 1/2"  
 Outlet Connection Size: 3/4"  
 Outlet Connection Type: Female NPT  
 Primary Material: Brass  
 Suggested Application: Bath  
 Valve Material: Bi-metal strip  
 Water Pressure Maximum: 85.0 psi  
 Water Pressure Minimum: 20.0 psi  
 Water Pressure Recommended: 45.0 psi

### INSPIRATION

The ViaWorks collection encompasses all Waterworks valves, which are just as impeccably engineered as our legendary fittings and the finest the industry has to offer in terms of performance, features and functionality. ViaWorks valves are engineered with more than three generations of bath and kitchen expertise, each with installers and lifelong service in mind.

### CODES & STANDARDS

ASME A112.18.1-2018/CSA B125.1-18, Complies with ASSE 1016-2017/ASME A112.1016-2017/CSA B125.16-17, State of MA

### PRODUCT FEATURES

Integrated anti-scald protection.

3/4" inlet and outlet connections. Integrated check valves guarantee there is no crossover of hot or cold water.

16 gpm (gallons per minute) unrestricted maximum flow at 60 psi

Flows water to up to six shower components simultaneously. Unique flush plate to clear construction debris before thermostatic cartridge is installed.


Designed exclusively for the .25 Thermostatic Control Valve Trim

### CERTIFICATIONS




### PRODUCT (NOTES)

ViaWorks 3/4" Thermostatic Valve with 7" Tile Guard

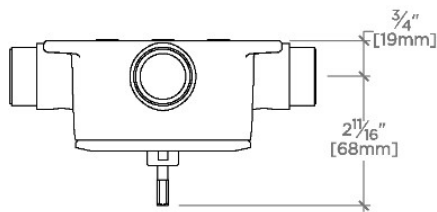


TOP VIEW

SCALE: 3"=1'-0"

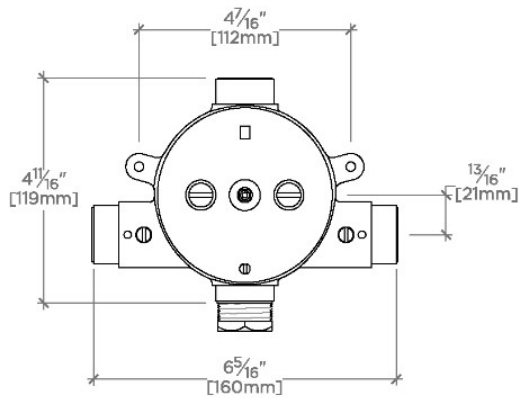

FRONT VIEW

SCALE: 3"=1'-0"



SIDE VIEW

SCALE: 3"=1'-0"