

OPUS

OPS145

Opus 4" Showerhead with 8" Wall Mounted 45 Degree Shower Arm



SHOWN IN OPUS 4" SHOWERHEAD WITH 8" WALL MOUNTED 45 DEGREE SHOWER ARM | OPS145

TECHNICAL DETAILS

Adjustable Versus Fixed Spray: Fixed
Fittings Hole Diameter: 1 1/4"
Inlet Connection Size: 1/2"
Inlet Connection Type: Male NPT
Pivot: Y
Primary Material: Brass
Restricted Maximum Flow Rate: 1.75 gpm
Water Pressure Maximum: 85.0 psi
Water Pressure Minimum: 20.0 psi
Water Pressure Recommended: 45.0 psi

INSPIRATION

Opus incorporates a range of sophisticated aesthetic notes, with graceful curves that create a jewel-like refinement.

CODES & STANDARDS

PRODUCT FEATURES

Made of Brass

Features a swivel 4" showerhead with easy clean rubber nozzles

Includes a 8" wall mounted 45 degree shower arm

Stocked in Brass, Chrome and Nickel

Showerhead available in 1.75gpm (6.6L/min) flow rate


CERTIFICATIONS

PRODUCT (NOTES)

OPUS

OPS145

Opus 4" Showerhead with 8" Wall Mounted 45 Degree Shower Arm

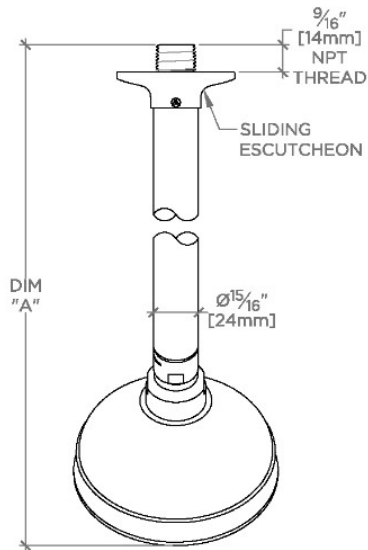

STYLE NO.	DIM "A"	DIM "B"
EAS144	10 7/16" [265mm]	6 1/4" [158mm]
OPS144		
EAS145	12 7/16" [316mm]	8 1/4" [209mm]
OPS145		

