

OPUS

OPS122

Opus 12" Rain Showerhead with 18" Ceiling Mounted Shower Arm



SHOWN IN OPUS 12" RAIN SHOWERHEAD WITH 18" CEILING MOUNTED SHOWER ARM | OPS122

TECHNICAL DETAILS

Adjustable Versus Fixed Spray: Fixed
Fittings Hole Diameter: 1 1/4"
Inlet Connection Size: 1/2"
Inlet Connection Type: Male NPT
Pivot: Y
Primary Material: Brass
Restricted Maximum Flow Rate: 1.75 gpm
Water Pressure Maximum: 85.0 psi
Water Pressure Minimum: 20.0 psi
Water Pressure Recommended: 45.0 psi

INSPIRATION

Opus incorporates a range of sophisticated aesthetic notes, with graceful curves that create a jewel-like refinement.

CODES & STANDARDS

PRODUCT FEATURES

Made of Brass

Features a swivel 12" rain showerhead with easy clean rubber nozzles

Includes an 18" ceiling mounted shower arm

Stocked in Brass, Chrome and Nickel

Rain showerhead available in 1.75gpm (6.6L/min) flow rate

CERTIFICATIONS


PRODUCT (NOTES)

WATERWORKS

OPUS

OPS122


Opus 12" Rain Showerhead with 18" Ceiling Mounted Shower Arm

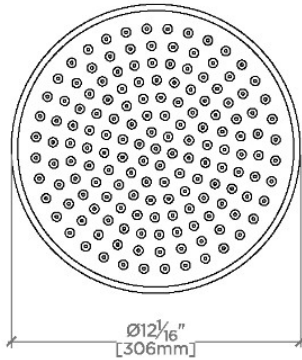

CEILING VIEW


SCALE: 1/2"=1'-0"

STYLE NO.	DIM "A"	DIM "B"
EAS120	11 ¹ / ₁₆ "	6 ⁹ / ₁₆ "
OPS120	[297mm]	[166mm]
EAS121	17 ³ / ₄ "	12 ⁹ / ₁₆ "
OPS121	[450mm]	[319mm]
EAS122	23 ³ / ₄ "	18 ⁹ / ₁₆ "
OPS122	[603mm]	[472mm]

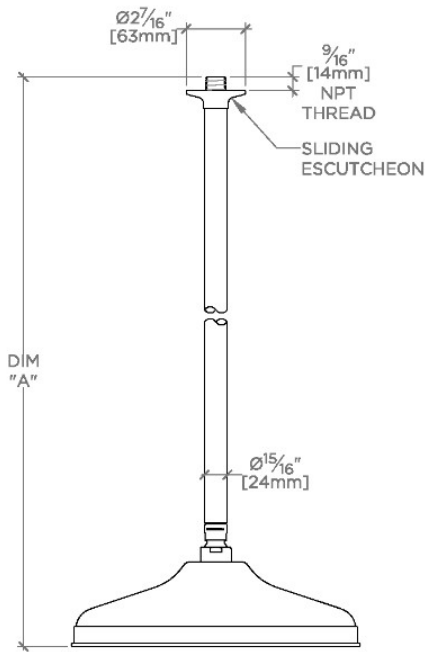

FRONT VIEW

SCALE: 1/2"=1'-0"

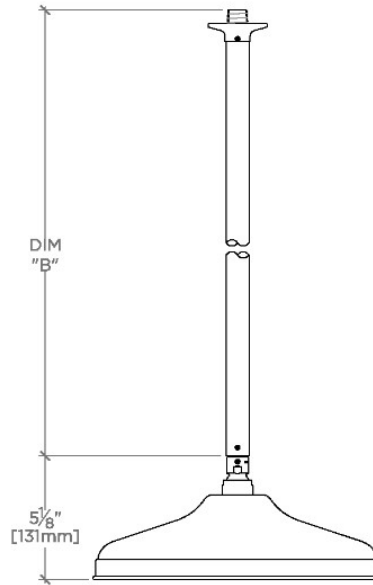

SIDE VIEW

SCALE: 1/2"=1'-0"