

# Sevier I Light Outdoor Wall

8538701, 8538751, 8638701, 8638751 | 1.1

GENERATION LIGHTING

WALL

**CAUTION - RISK OF FIRE**  
This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.  
Use minimum 90°C supply conductors.

## GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for wet locations.

Incandescent version may be dimmed with a standard incandescent dimmer. LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

This instruction shows a typical installation.


GENERATION LIGHTING

7400 Linder Ave, Skokie, IL 160077

800.969.3347

[www.generationlighting.com](http://www.generationlighting.com)


© 2020 Generation Lighting. All rights reserved.  
The "Generation Lighting" graphic is a registered trademark of Generation Lighting. Generation Lighting reserves the right to change specifications for product improvements without notification.

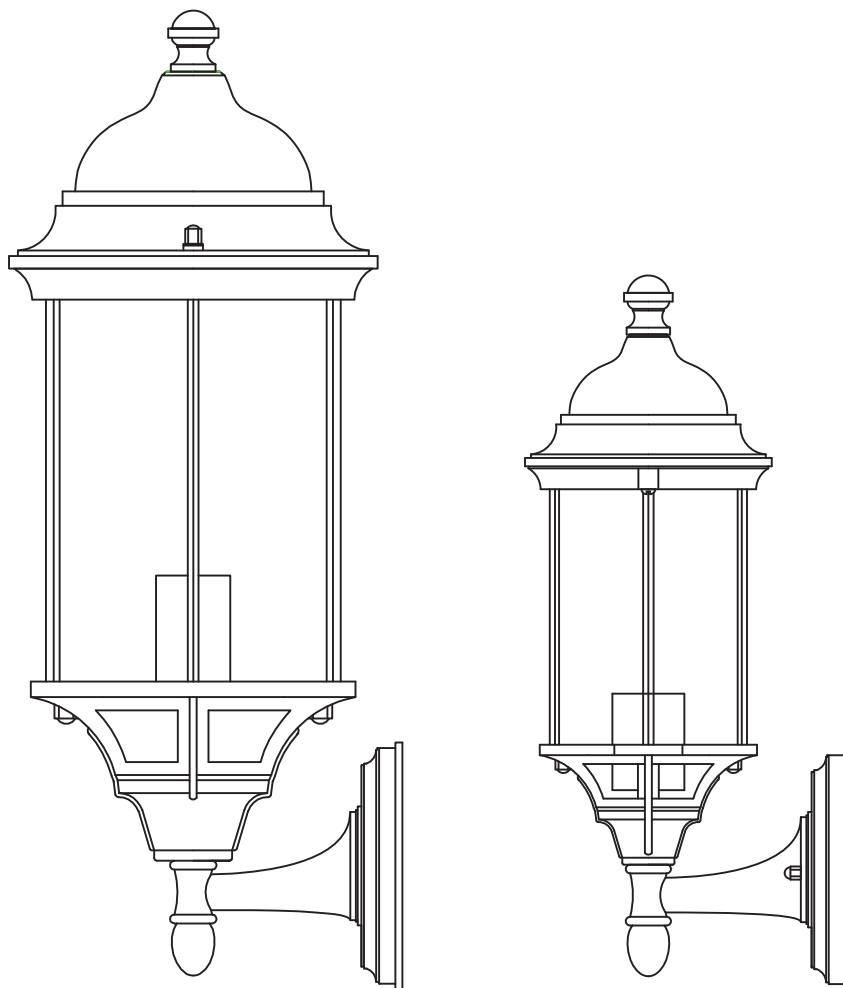

**SAVE THESE INSTRUCTIONS!**

# Install the Fixture

1A

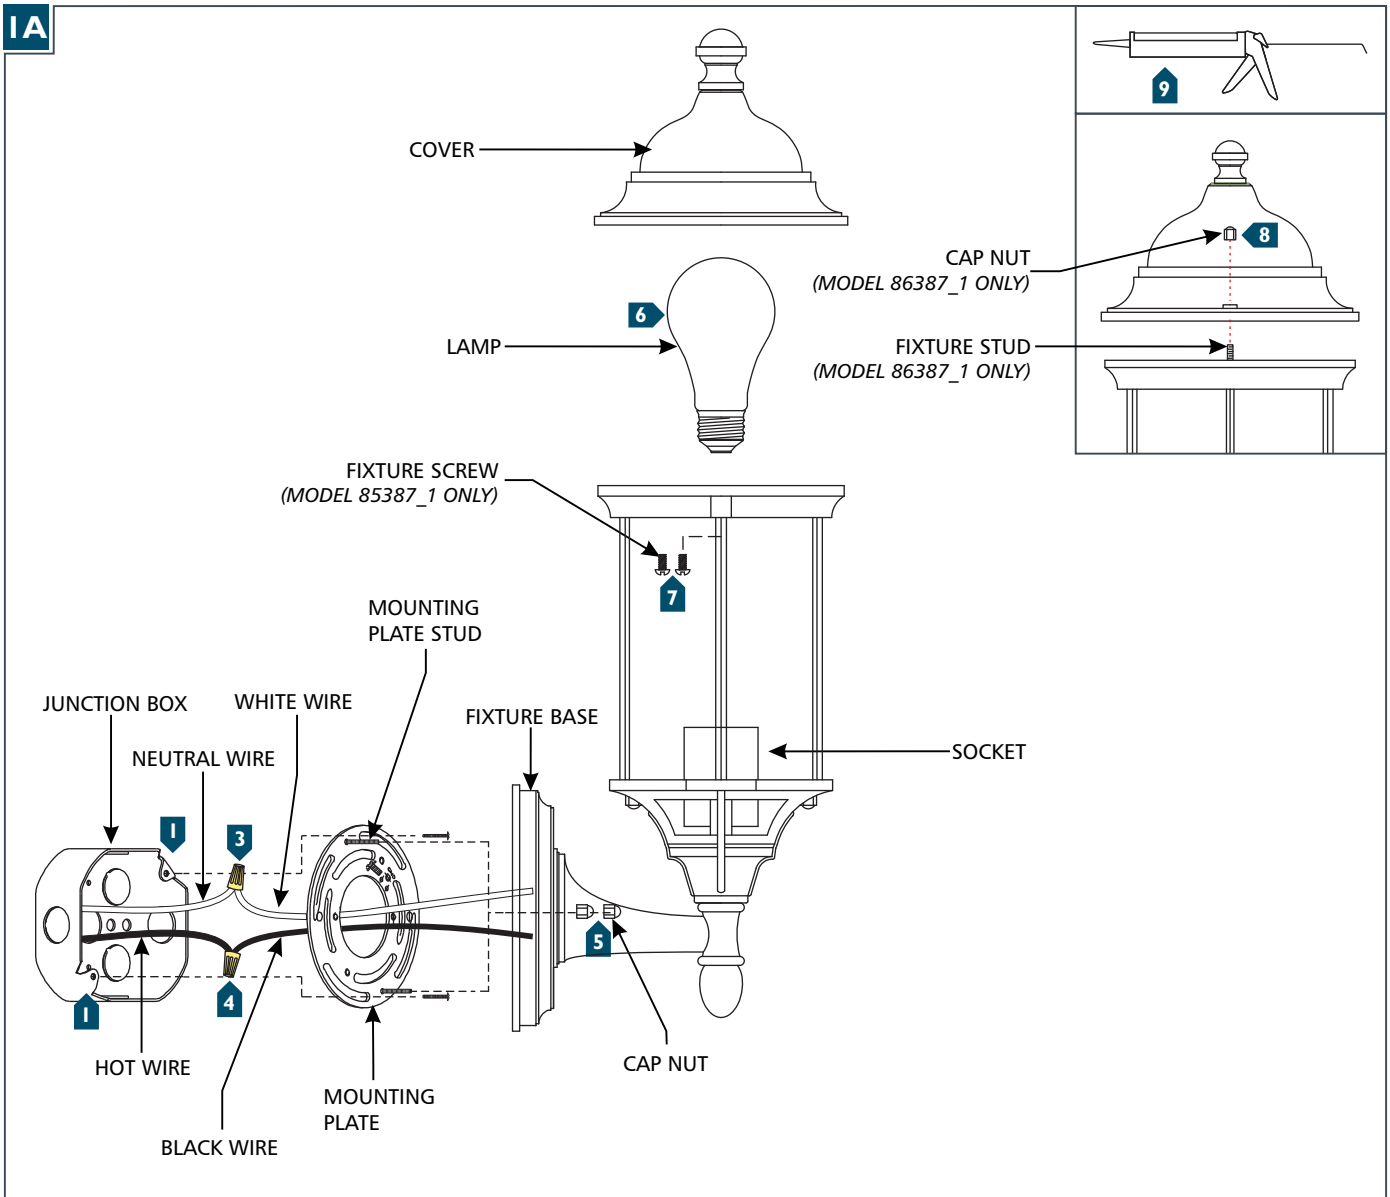

- 1** Secure the mounting plate to the junction box.
- 2** Connect the fixture to a suitable ground in accordance to local electrical codes.
- 3** Connect the white fixture wire to the neutral power line wire with a wire nut.
- 4** Connect the black fixture wire to the hot power line wire with a wire nut.
- 5** Align and place the fixture base onto the mounting plate studs and secure it with the two cap nuts.
- 6** Screw the lamp into the socket. Refer to the label on the socket for Max Wattage Information.
- 7** For Model 85387\_1: Place the cover onto the fixture and secure it in place with the fixture screws. **Skip to step 9.**
- 8** For Model 86387\_1: Place the cover onto the fixture studs and secure it in place with the cap nuts.
- 9** For wet locations, caulk around the base of the fixture with waterproof construction sealant.