

Disk Recessed Light

Design by R. Toso - N. Massari & Associates

LED

Wattage 1x16 W, 500 mA LED, 1500 Lumens
1x23 W, 700 mA LED, 2000 Lumens

Color Temperature 2700 K, 3000 K, 3500 K, 4000 K

Driver Dimmable electronic driver
ELV or 0-10 V
(consult website: leucosusa.com for a list of compatible dimmers)

LED Housing Options New Construction, Remodel, Insulated, Chicago Plenum

Lo-Voltage

Remodel 1x50 W, lo-voltage halogen, MR-16 ⚡
New Construction 1x50 W, lo-voltage halogen, MR-16 ⚡
Insulated Ceiling 1x35 W, lo-voltage halogen, MR-16 ⚡

Damp Location Yes




Voltage 120 Volts
277 Volts

Ceiling Cutout 3 5/8" (92 mm)

Trim Dimensions Width: 5 1/2" (139 mm)
Height: 1 1/4" (32 mm)

Housing Dimensions Length: 4 5/8" (117 mm)
Width: 13" (330 mm)

Certifications Housing is UL listed

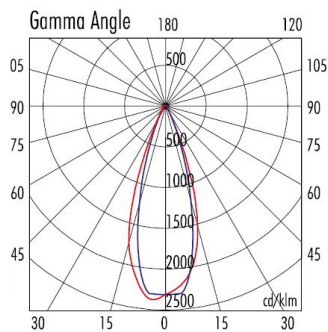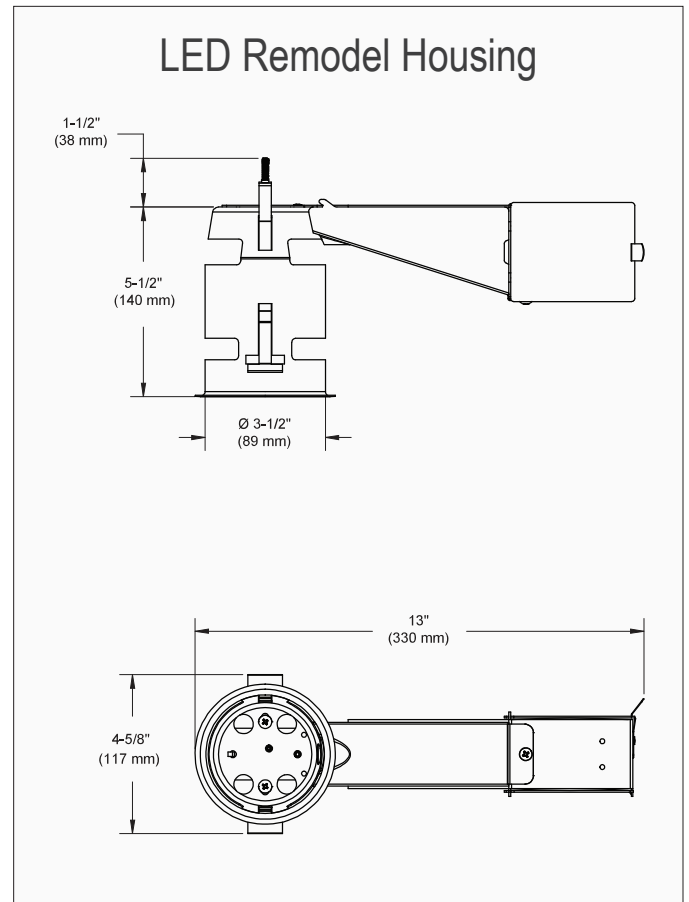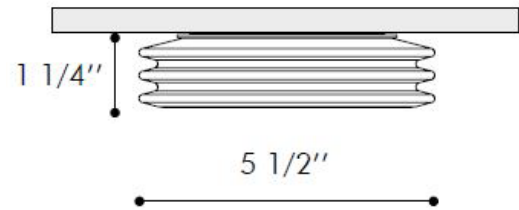

MR16 - 50W 38°

Lux		
h	E max	E med
1.00	2199	1309
2.00	550	327
3.00	244	145
4.00	137	82
5.00	88	52



Crystal



Satin White